


Figure 1. SnapLoc® 90 (closed)

Figure 2: SnapLoc® Radius (closed)

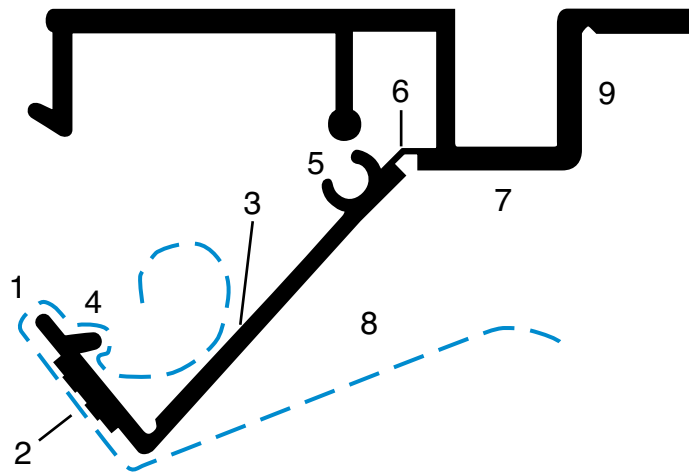

The SnapLoc System

1. SnapLoc track has a snap that locks textiles between a ball and socket fastener.
2. Adhesive surface holds the textile in place at the outer edges to allow proper alignment and maximum tension to be locked into place.
3. Outside edge hook and clasp allows for a wide range of fabric to be specified along with fabric liners.
4. Ball and socket design lock and compresses track to hold textiles at the highest tensions.
5. Hinge allows complete opening of track without gaps between track and infill.
6. Rigid unique track that does not flex easily and allows for atmospheric fluctuations, thicker fabrics and liners in order to function best with this track design.
7. Angled end of track design is sloped upwards. This allows the fabric to float above the infill and track which helps to hide possible telegraphing issues as well.

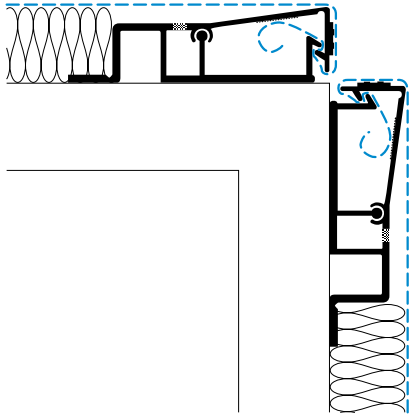


Figure 3: SnapLoc® 90
Quirk-reveal outside corner

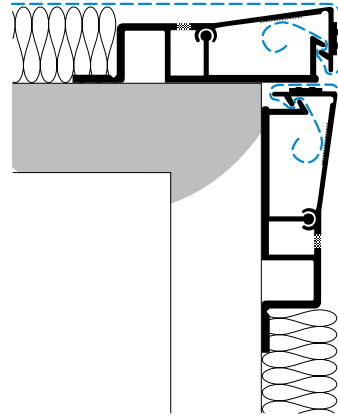


Figure 4: SnapLoc® 90
Outside wrapped corner

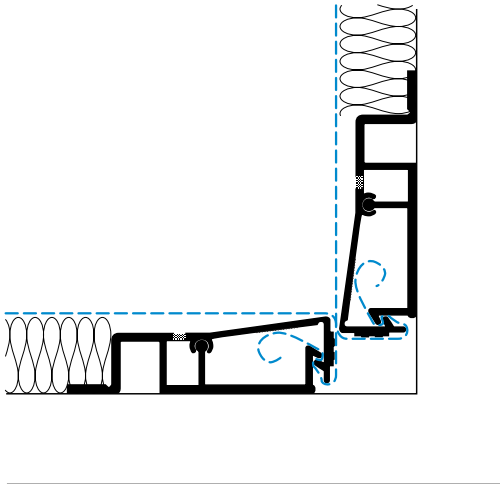


Figure 5: SnapLoc® 90
Tight inside corner

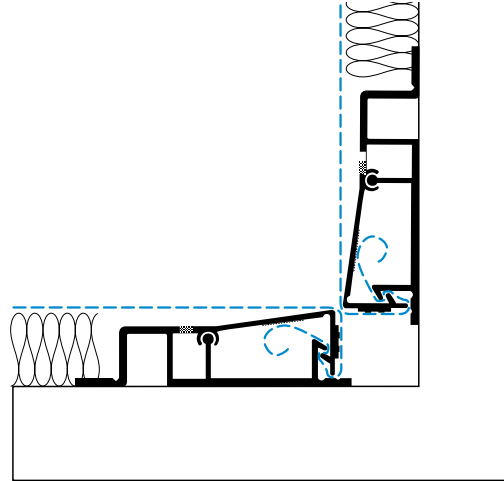


Figure 6: SnapLoc® 90
Inside corner

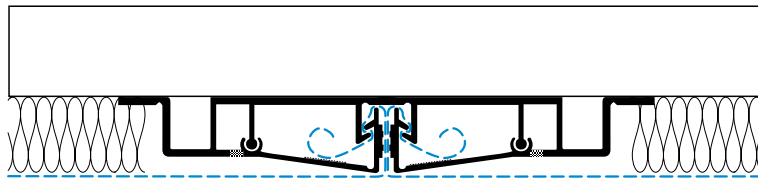


Figure 7: SnapLoc® 90
Butt joint



Figure 8: SnapLoc® Radius
Butt joint